


EZ16585

NITY SZCZELNY ŁEB PŁASKI

Closed blindrivets with flat head, grooved mandrel

PN-EN ISO 16585

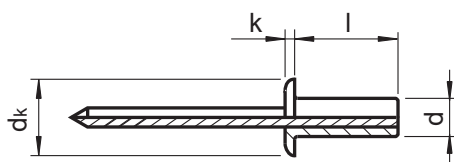

d	l	dk	k _{max}	zakres łączenia	moment ścianania	moment rozciąg.	asort. w ofercie	
[mm]	[mm]	[mm]	[mm]	[mm]	[N]	[N]		[szt./pc.]
3,2	6	6,7	1,3	0,5-1,5	2000	2200	● ▲	500
	8	6,7	1,3	1,5-3,0	2000	2200	● ▲	500
	10	6,7	1,3	3,0-5,0	2000	2200	● ▲	500
	12	6,7	1,3	5,0-6,5	2000	2200	● ▲	500
	14	6,7	1,3	6,5-8,0	2000	2200	● ▲	500
4	6	8,4	1,7	0,5-1,5	3000	3500	● ▲	500
	8	8,4	1,7	1,5-3,0	3000	3500	● ▲	500
	10	8,4	1,7	3,0-5,0	3000	3500	● ▲	500
	12	8,4	1,7	5,0-6,5	3000	3500	● ▲	500
	14	8,4	1,7	6,5-8,0	3000	3500	● ▲	500
	16	8,4	1,7	8,0-11,0	3000	3500	● ▲	500

d	l	dk	k _{max}	zakres łączenia	moment ścianania	moment rozciąg.	asort. w ofercie	
[mm]	[mm]	[mm]	[mm]	[mm]	[N]	[N]		[szt./pc.]
4,8	8	10,1	2	0,5-3,0	4000	4400	● ▲	500
	10	10,1	2	3,0-5,0	4000	4400	● ▲	500
	12	10,1	2	5,0-6,5	4000	4400	● ▲	500
	14	10,1	2	6,0-7,5	4000	4400	● ▲	500
	16	10,1	2	6,5-9,0	4000	4400	● ▲	500
	20	10,1	2	9,0-12,0	4000	4400	● ▲	250
6,4	12	13,4	2,7	1,5-6,5	6000	8000	● ▲	250
	14	13,4	2,7	5,0-7,0	6000	8000	● ▲	250
	16	13,4	2,7	6,5-8,0	6000	8000	● ▲	250
	20	13,4	2,7	8,0-12,0	6000	8000	● ▲	250

● - asortyment A2 w ofercie / product A2 in offer | ▲ - asortyment A4 w ofercie / product A4 in offer