


CL600 Glue joint cutters (longitudinal connection)



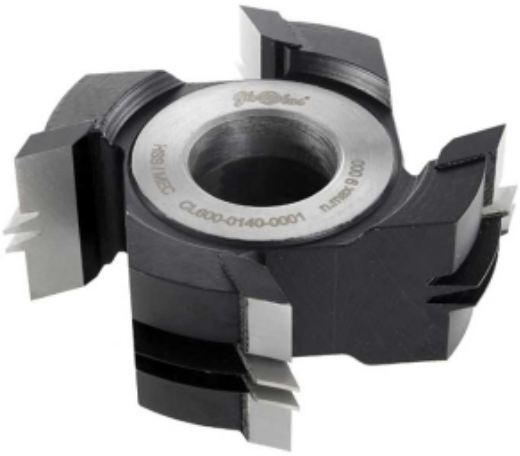





Features - benefits

- cutters with soldered HSS tips (high speed steel of high quality)
- processing of materials of different width ? range given in the table below
- joining is characterized by very high strength and rigidity
- joining used in wooden constructions
- offer includes cutters made to order according to technical drawing or model piece or customer?s profile
- wide range of after-sales services: sharpening, bore adjustment and repair

Application

- execution of multi-link joints on faces of joined elements with a line contact on planes
- longitudinal connection of raw wood
- milling of multi-link joints across the grain
- cutters used on bottom spindle milling machines, single- and double-ended pattern tenoning machines with mechanical feed

Catalogue	Index	∅ D [mm] Outer diameter	∅ d [mm] Inner diameter	B [mm] Cutter height	Z Teeth number	U.m.
●	CL600-0140-0001	0140	40	50	4	szt.
●	CL600-0140-0002	0140	40	60	4	szt.

Download

TechInfo_CL_LJ_eng.pdf

Related products

Saw blades LL CUT line 3GE / 3GS for defects removing



Glue joint cutters (longitudinal connection)



Glue joint cutters (longitudinal connection)



Glue joint cutters (crossconnection)



Flanged reducer sleeves

