




FP930

VHM circular saw blades - B 15° for metal cutting

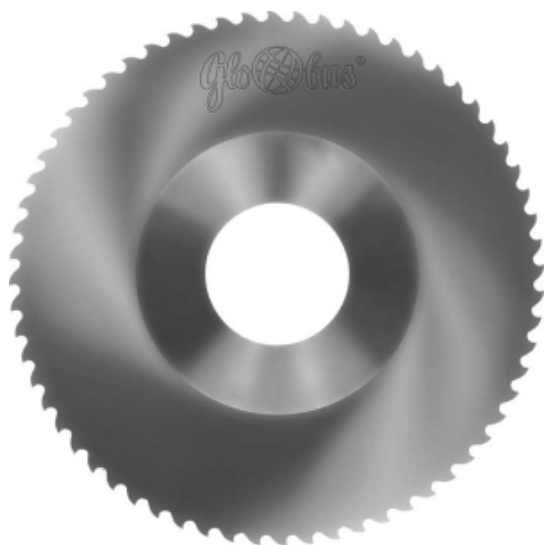

Features - benefits

made of properly selected sintered carbide grade
production of the tools based on the latest methods and technologies of teeth
cutting, grinding and thermo-chemical treatment
all standard circular saw blades are hollow ground according to specifics for given
diameters which prevents from getting seized up in the cutting process
possibility of ordering circular saw blades with other parameters (diameter, bore,
number and geometry of teeth) which allows to meet clients' needs and
expectations
in order to increase the lifetime of the blades there is possibility to cover the blades
with refinement coatings, i.e. PVD
in case of group working please provide us with number of blades mounted in the
spindle ? tools will be produced to a special order with the same diameter

Application

sintered carbide is characterized by several times higher hardness than high-speed
steel, VHM circular saw blades can successfully process steels with hardnesses
above 50HRC, acid-resistant steels and heat-resistant steels, titanium alloys, etc.
when using VHM circular saw blades for low-alloy steels processing, machining speed
can be 2-3 times higher than from HSS circular saw blades
tooth type B (curved tooth) is used for larger cutting depths and for machining of
solid and thick-walled elements
tooth type B is used, among others for grooving (deeper grooves)
since VHM circular saw blades are very hard and fragile it is advisable to use them
on machine tools that ensure stable working conditions as well as proper and rigid
attachment of the workpiece
rake angle depends on the type/grade of material cut

Catalogue	Index	Ø D [mm] Outer diameter	Ø d [mm] Inner diameter	B [mm] Kerf	Z Teeth number	Ø d1 [mm] Flange diameter	U.m.
○	FP930-0080-0001	0080,0	22,0	1,00	48	36,00	szt.
○	FP930-0080-0002	0080,0	22,0	1,20	48	36,00	szt.
○	FP930-0080-0003	0080,0	22,0	1,60	48	-	szt.

INFO:

tool mentioned above made to customer order
min. order quantity - acc. to individual agreement

Download

[TechInfo_FP_frezypilkowe_eng.pdf](#)
[UserManual_FP_GLOBUS_eng.pdf](#)

Related products

[HSS circular saw blades - A and Aw 5°
for metal cutting](#)



[HSS circular saw blades for cut-off](#)

[HSS circular saw blades - B and Bw 15°
for metal cutting](#)




[HSS circular saw blades for cut-off](#)

[VHM circular saw blades - A 5° for metal
cutting](#)



[HSS circular saw blades for cut-off
machines - Bw 18°](#)



[machines - PASSIVATED](#)



[machines - TiN](#)

